



Specification





Product		Version.26v1
Item number	HS-0306B	
Item name	HS-0306B Test Probe For mm8030 With MMCXF (8G)	
Specifications		
Frequency Range	DC ~ 8GHz	
VSWR	1.3 Max.	
Impedance	50Ω	
Connector	MMCX Female	
Application	mm8030	
Durability (Probe Side)	20000 matings min.	
Operating Temperature Range	-65°C ~ 165°C	
Full travel	2 mm	
Recommended travel	-	
Spring Force	-	
Spring Force (shell/grand)	Shell 325g±20% @2mm Shell 190g±20% @1mm Shell 60g±20% @0mm	
Material		
Part	Material	Finish
Center contact	Phosphor Bronze. Steel	Gold
Insulator	PTFE	White
Outer Contact	Brass	Gold

Picture





Technical Drawing

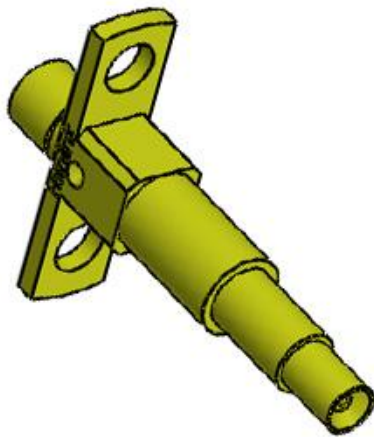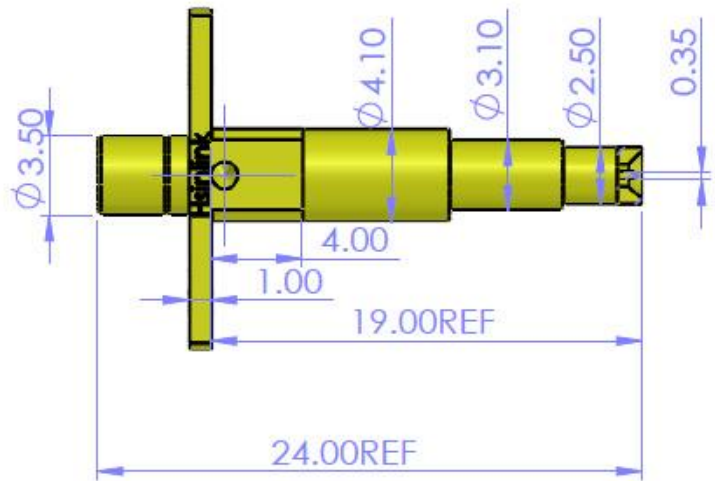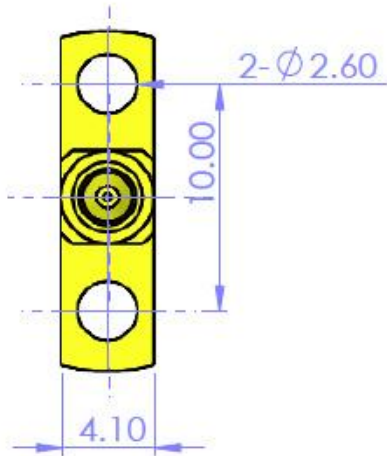

Applicaton : MM8030



Test Report

Test with P/N: 06-010100-0002 HS-SMAF To mm8030 Adapter (8G)

